




## 10W POLYCRYSTALLINE SOLAR MODULE

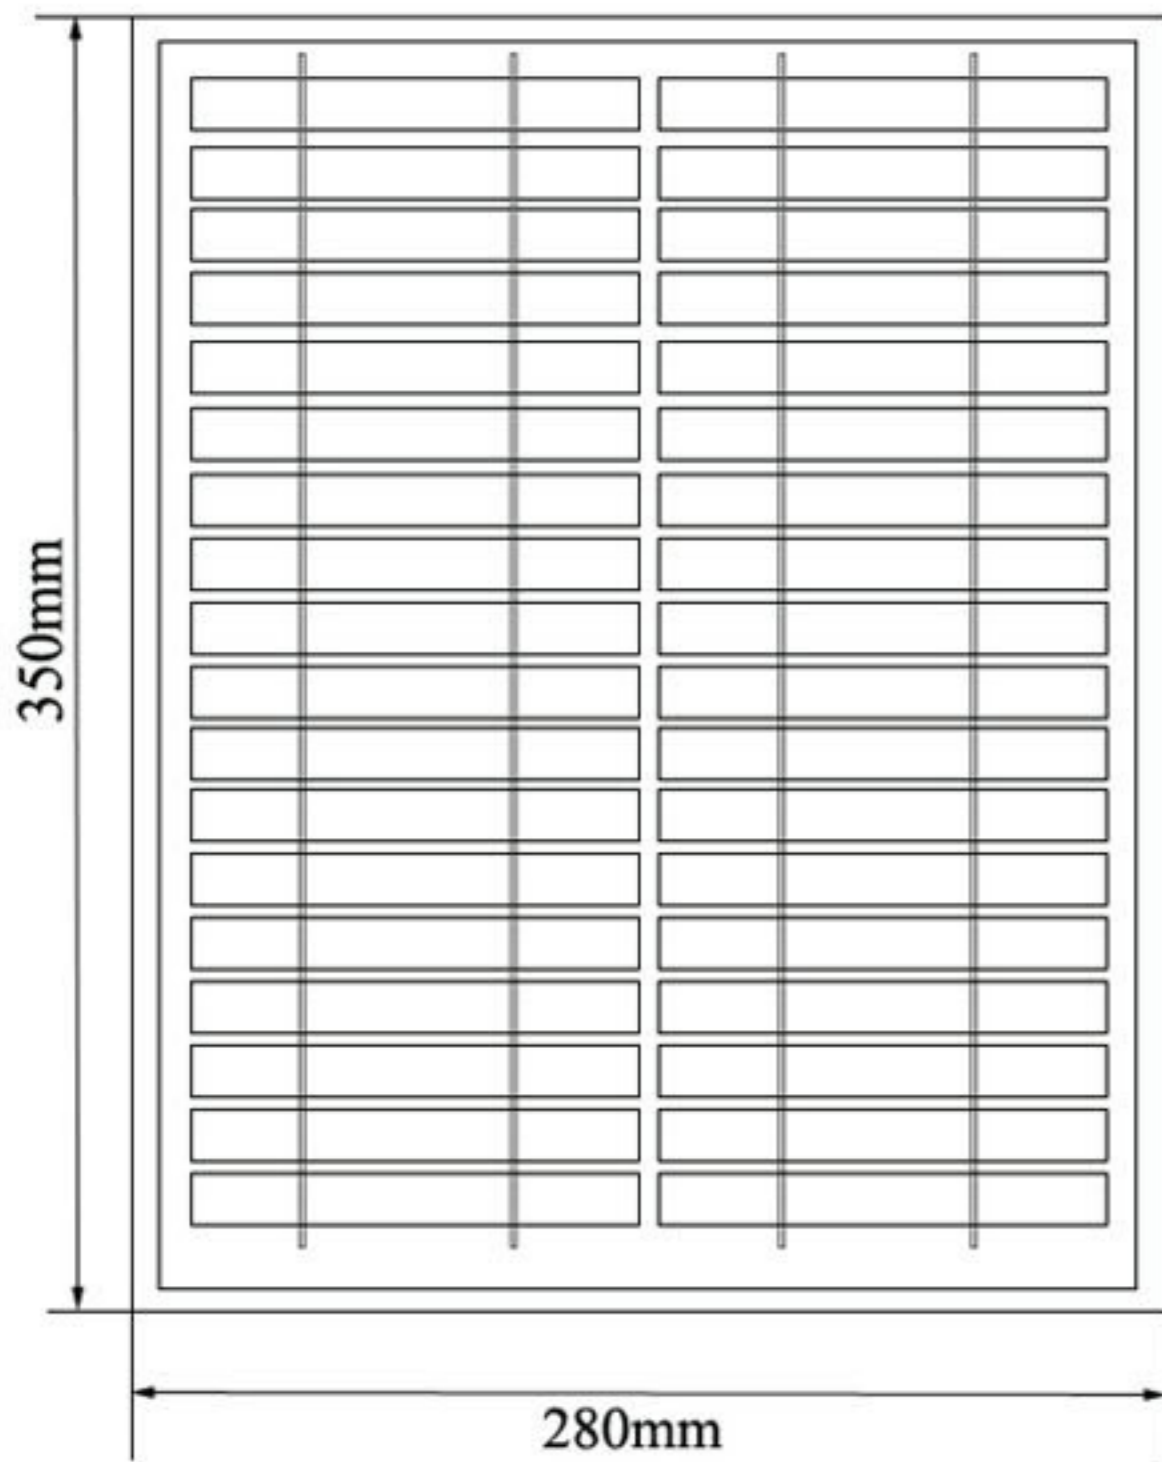

FRONT VIEW

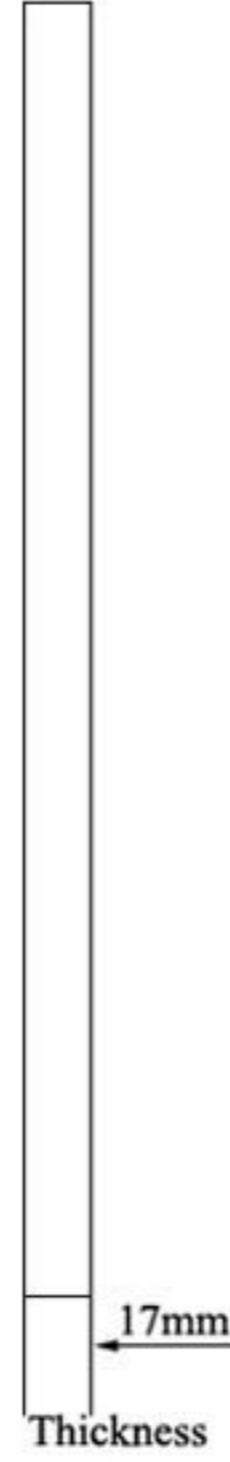

SIDE VIEW

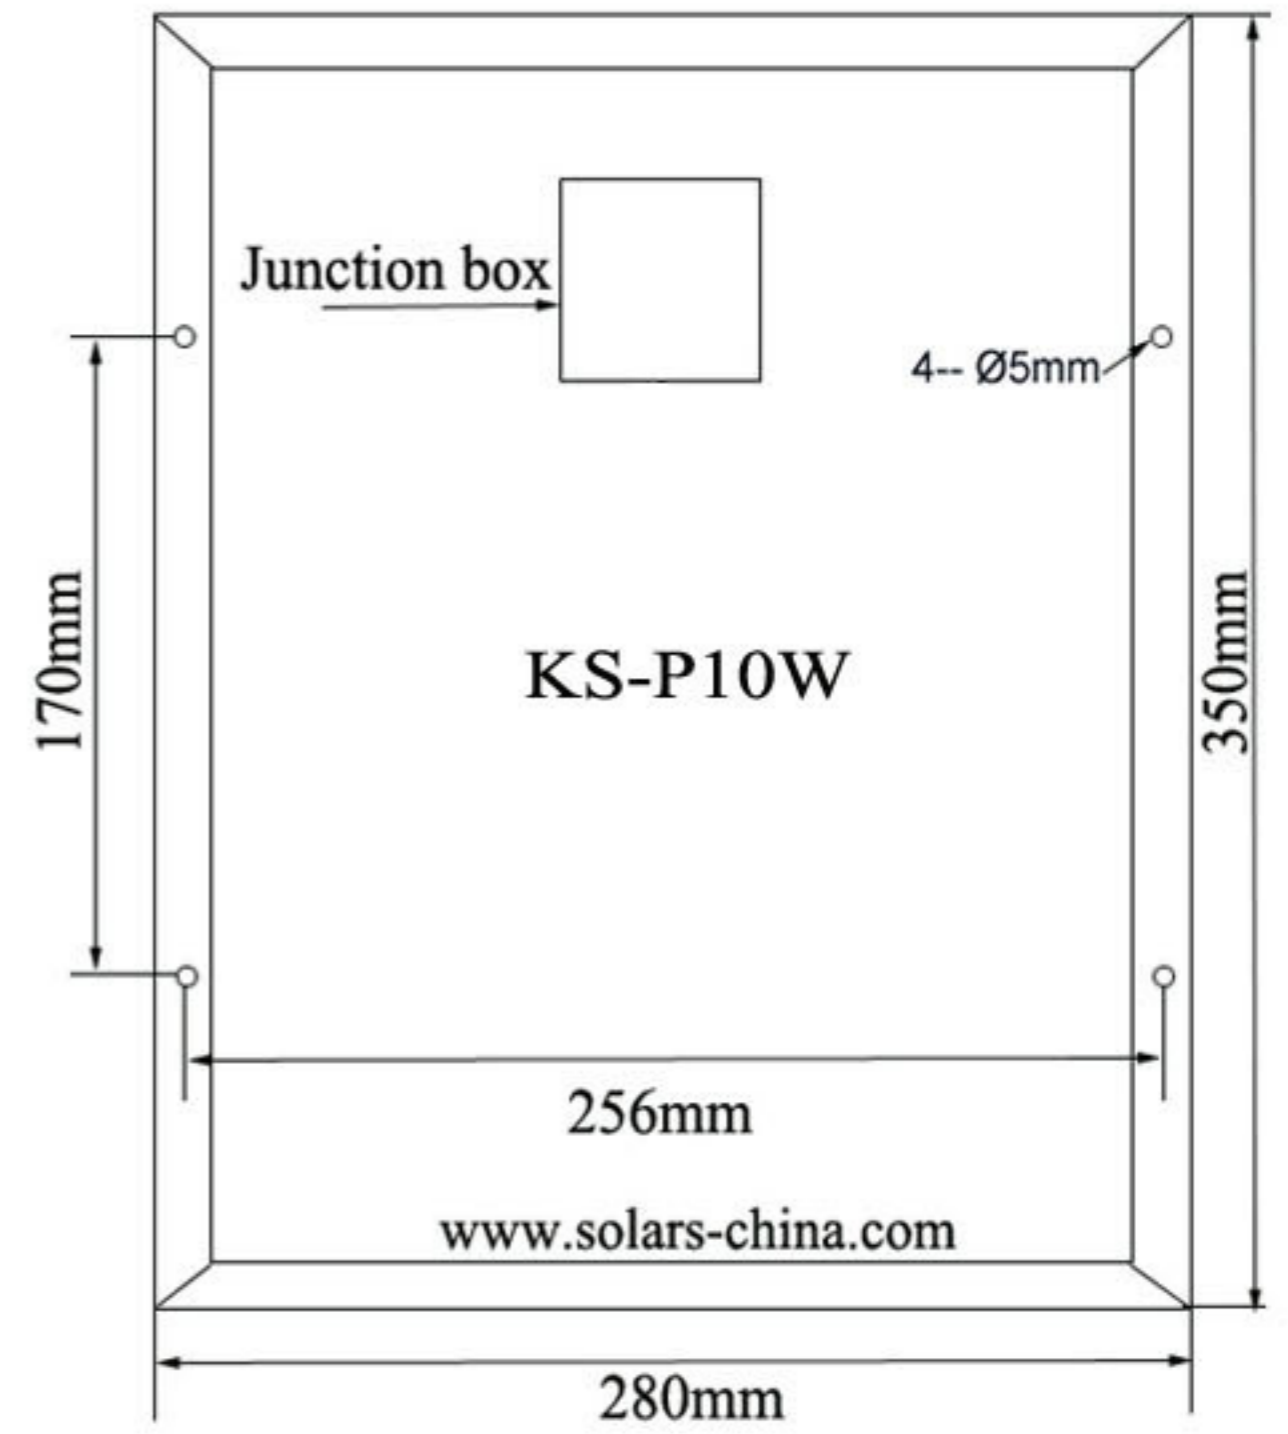

BACK VIEW

### ELECTRICAL CHARACTERISTICS

Power	10W
Operating Voltage	18V
Operating Current	556mA
Type of solar cell	Polycrystalline Silicon
Power Tolerance	±5%
STC: Irradiance 1000W/m <sup>2</sup> , Module temperature: 25°C, AM=1.5	

### TEMPERATURE COEFFICIENTS

Nominal Operating Cell Temperature (NOCT): 45°C±2°C	
Temp.Coefficient of I <sub>sc</sub>	(0.045±0.01)%/°C
Temp.Coefficient of V <sub>oc</sub>	-(0.34±0.01)/°C
Temp.Coefficient of Power	-(0.47±0.05)%/°C

### TESTED OPERATING CONDITIONS

Max load	50psf 245kg/m <sup>2</sup> (2400)pascals
Hailstone impact	25mm(1inch) at 23m/s(52mph)
Temperature	-40° C to + 85° C

### MECHANICAL SPECIFICATIONS

Dimensions	350*280*17mm
Encapsulation	Glass/EVA/Cells/EVA/TPT
Front Glass	Tempered Glass, thickness: 3.2mm
Frame	Anodized aluminum alloy (Silver)
Output lead wire	Without solder wire
Efficiency	≥16%

### FIGURE OF STRUCTURE



### WARRANTIES

Power output more than 90% for 10years  
 Power output more than 80% for 25years  
 Working life 25years

The technical files provided by CHINA SOLAR LTD

Office Address:  
 NO.601,ZhongKang Pioneer Park,ZhongKang Road,  
 Futian District, ShenZhen City,Guangdong Province,China  
 Factory Address:  
 Longxi Hi-tech Industrial Park, Longcheng Road, Longgang  
 Town, ShenZhen City,Guangdong Province,China



Tel: +86.755.8351 5659  
 Fax: +86.755.8271 6024  
 Website: <http://www.solars-china.com>  
 Email: [market@solars-china.com](mailto:market@solars-china.com)  
 MSN: [market@solars-china.com](mailto:market@solars-china.com)  
 Skype: KAXIDY